



Latest High Technology

Automatic Door Microcomputer Control System with High Range AC Voltage Input Function  
90V - 250V 50/60 Hz

# **MİKROİŞLEMCİ KONTROLLÜ HASTANE VE AMELİYATHANE KAPI OPERATÖRLERİ**

## **ÜRÜN KATALOĞU**






*Mikroişlemci ekipmanıyla yumuşak açılır ve kapanır.*

*Sık açma/kapama için en iyi tercih TRONCO...*

*Program Seçici*




*5 Değişik program alternatifi...*

- 1. Normal*
- 2. Yarı Açık*
- 3. Tam Açık*
- 4. Sadece Çıkış*
- 5. Kilitli*

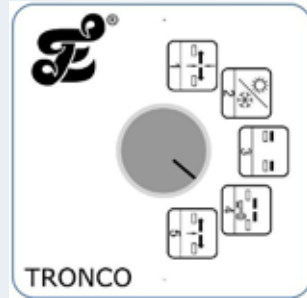


Dış mekan hastane kapıları, hastaneler, laboratuvarlar ve hijyen gerektiren yerler için ideal kapılardır. Sızdırmazlık özelliği sağlanmış olan bu kapılar, ısı, gürültü, toz v.b. gibi şeylerden kullanıldığı ekanları korur.



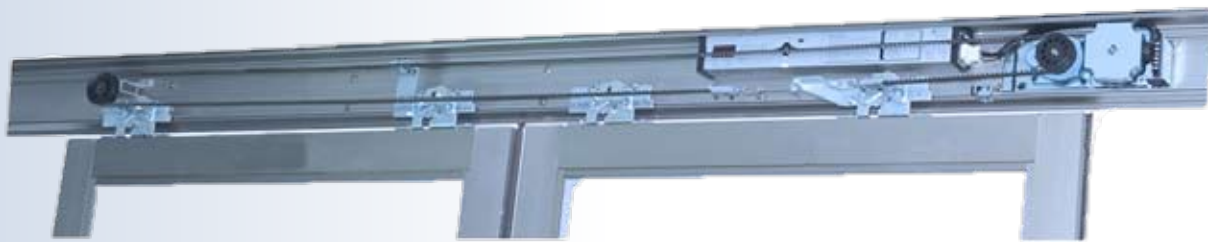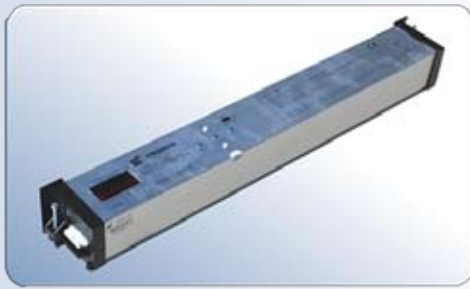

TECHNICAL SPECIFICATIONS		
MODEL	CS1000 series	CS1000-B CS1000-F CS1000-P CS1000-W
Level	L2	
Capacity(kg)	Single-sliding (1 wing)	Bi-parting (2 wings)
	150 kg	120*2 kg
Manual door opening/ closing force (During power failure)	2.5 ~ 4 kg	3 ~ 5 kg
Operating rating	Continuous repeated door opening/closing	
Transmission	Toothed belt	
Drive-wheel material	Powder metallurgy	
Control system	Microprocessor(Dimension: 450 x 51 x 65 mm)	
Function	1.5 functions	
Hanger	Adjustable single wheel hanger	
Motor	DC brushless Motor	
Watt	40W~60W	
Speed(mm/sec)	150-650 mm/sec (Adjustable)	
Applicable door(mm)	The common size of wing can be used	
The optimum distance (mm)	600-5000mm[1 wing]	
The maximum distance (mm)	500-6000mm[12000mm 2wings]	
Operating voltage and power consumption	AC 90V~ 250V 60/50Hz 1.9A~0.8A 120W	
Door open time control	1-60 sec	
Display Mode	1.Distance counter 2.RPM Speed(mm/sec)	
Ambient temperature	-20°C~+45	
OPTIONS	<ul style="list-style-type: none"> <li>○ B : Base</li> <li>○ F : Function Wires</li> <li>○ P : Programe selector</li> <li>○ Programe switch</li> <li>○ Key switch</li> <li>○ W: Wireless</li> </ul>	

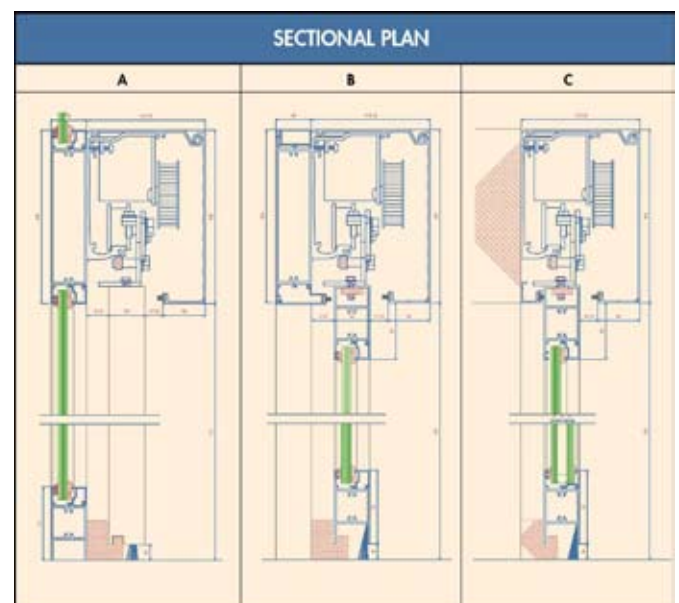



[www.tronco.com.tr](http://www.tronco.com.tr)

[info@tronco.com.tr](mailto:info@tronco.com.tr)

